


# Appliance and Sensor specifications

Vectra can be deployed in Cloud, On-Prem, and Virtual environments to satisfy customer security requirements. For the Cloud, we support vSensors in AWS, Azure, and GCP. For On-Prem, we have both hardware sensors (S-Series, X-Series), and virtual sensors (VMware ESXi, Hyper-V, and KVM) to provide flexible deployment and coverage.

Included in your Vectra subscription, software updates with new threat detection algorithms are delivered to your system on a regular basis to ensure continuous protection from the latest advanced threats.

To extend the reach of Vectra, X-Series and S-series Sensors are easily deployed at remote sites or with access switches on internal network segments. They passively monitor network traffic, extract critical metadata and forward it to Vectra for analysis and threat detection. Sensors can be deployed out-of-band on a SPAN port, network TAP, or packet broker.

## With Vectra, attackers have nowhere to hide

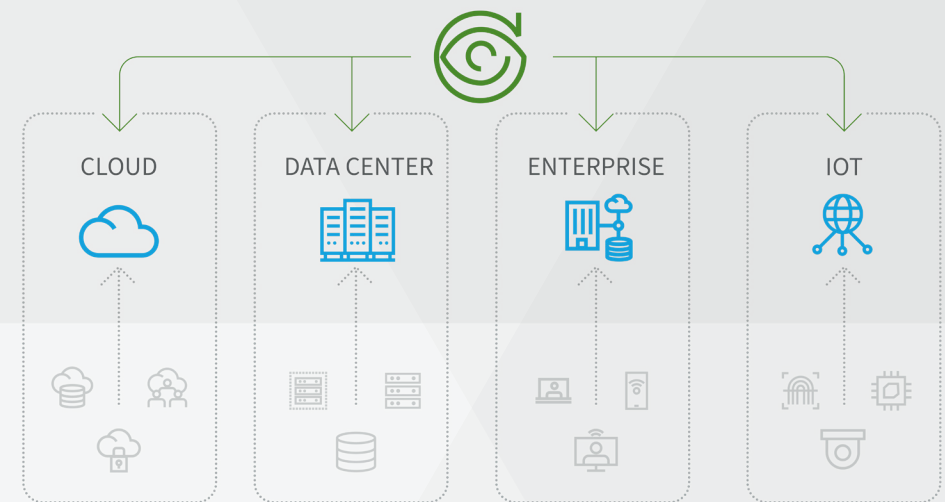

## Virtual Sensors

Virtual Sensors, known as vSensors, run in VMware ESXi, Microsoft Hyper-V, and KVM, making it easy to extend Vectra threat detection coverage across the physical network and into virtualized data centers. VMware vSensors support both VSS and VDS VMware switch types to provide visibility into all traffic and detect threats that pass between workloads in the virtual environment. Vectra also integrates with VMware vCenter so it has authoritative, always up-to-date views of the virtual environment.

**Physical Appliance Performance**

Appliances	MGT Interfaces	Capture Ports	Paired Sensors	Sensor Mode Performance	Mixed Mode Performance	Brain Mode Performance
<b>X29</b>	2 x 10/100/1000 Copper Interfaces or 1 x 10Gbps SFP+ Interface	2 x 1 GbE 2 x 10 Gb SFP+	150	15 Gbps	8 Gbps	20 Gbps
<b>S11</b>	2 x 10/100/1000 Copper Interfaces	2x1 GbE	N/A	2Gbps	N/A	N/A
<b>S101</b>	2 x SFP+ Interfaces (included in purchase, model selected by customer)	2 x 10G SFP+ and 2 configurable to: SFP28 (10/25 G) or QSFP (40 G) or QSFP28 (100 G)	N/A	50 Gbps	N/A	N/A
<b>B101</b>	2 x SFP+ Interfaces (included in purchase, model selected by customer)	N/A	500	N/A	N/A	75 Gbps

**Notes regarding performance chart above:**

- **Paired Sensors** – Refers to how many Sensors (physical, virtual, or cloud) an appliance can pair with.
- **N/A – Refers** to unsupported modes. For example, an S11 cannot be used as a Brain, therefore the only relevant metric for an S11 is the performance in Sensor mode.
- **Performance** – Refers to the amount of network traffic observed by Sensors that a Sensor can produce metadata for, or the amount of traffic observed by Sensors that a Brain can process metadata for. The performance numbers are based upon average throughput a given Sensor/Brain can process. Actual performance may vary depending on traffic composition. Please contact Vectra to discuss further.
- 10Gbps management Interface supported in 6.19 or later. Consumes one of the 10Gbps traffic interfaces to operate as a management interface
- Console access to Vectra appliances detailed in: [Support](#)

**Physical Appliance Specifications**

	X29/M29 Appliance	S11 Sensor	S101 Sensor	B101
<b>Input Voltage</b>	Dual modular power supplies; auto-sensing 100-240 VAC, 50-60 Hz	Single power supply, auto-sensing 100-240VAC, 50-60 Hz	Dual modular power supplies; auto-sensing 100-240 VAC, 50-60 Hz	Dual modular power supplies; auto sensing 100-240 VAC, 50-60 Hz
<b>Power</b>	550 watts	450W (Max), 200 Watts (Normal)	1600 watts	1600 watts
<b>Current</b>	7.4 A at 120 VAC, 3.7 A at 240 VAC	3.5A to 6.5A (Max), 2A (Normal) at 110V	10 A	8.7 amps
<b>Dimensions</b>	45 mm (1.75 in) H x 432 mm (17 in) W x 660 mm (26 in) D	42.8 mm (1.69 in) H x 434 mm (17.1 in) W x 535mm (22.6 in) D	42.8 mm (1.69 in) H x 482.0 mm (18.98 in) W x 808.5 mm (31.8 in) D	42.8 mm (1.69 in) H x 482 mm (18.98 in) W x 808.5mm (31.8 in) D
<b>Weight</b>	12 kg (27 lbs)	12.2 kg, 26.9 lb	21.9kg (48.3 lbs)	21.9 kg (48.3 lbs)
<b>Environment</b>	<p><b>Operating temperature:</b></p> <ul style="list-style-type: none"> <li>• 0° to 35° C (32° to 95° F)</li> </ul> <p><b>Non-operating temperature:</b></p> <ul style="list-style-type: none"> <li>• 0° to 50° C (32° to 122° F)</li> </ul> <p><b>Airflow:</b></p> <ul style="list-style-type: none"> <li>• Front to back</li> </ul>	<p><b>Operating temperature:</b></p> <ul style="list-style-type: none"> <li>• 10° to 35° C (50° to 95° F)</li> </ul> <p><b>Non-operating temperature:</b></p> <ul style="list-style-type: none"> <li>• -40° to 65° C (-40° to 149° F)</li> </ul> <p><b>Airflow:</b></p> <ul style="list-style-type: none"> <li>• Front to back</li> </ul>	<p><b>Operating temperature:</b></p> <ul style="list-style-type: none"> <li>• 10° to 35° C (50° to 95° F)</li> </ul> <p><b>Non-operating temperature:</b></p> <ul style="list-style-type: none"> <li>• -40° to 65° C (-40° to 149° F)</li> </ul> <p><b>Airflow:</b></p> <ul style="list-style-type: none"> <li>• Front to back</li> </ul>	<p><b>Operating temperature:</b></p> <ul style="list-style-type: none"> <li>• 10° to 35° C (50° to 95° F)</li> </ul> <p><b>Non-operating temperature:</b></p> <ul style="list-style-type: none"> <li>• -40° to 65° C (-40° to 149° F)</li> </ul> <p><b>Airflow:</b></p> <ul style="list-style-type: none"> <li>• Front to back</li> </ul>

**Virtual Sensors - Customer Premise Hypervisor Deployment**

Hypervisor	VM Type	Cores	Memory	Storage	Performance
<b>VMware</b>	vSphere 6.5 or later	2	8 GB	100 GB	500 Mbps
<b>VMware</b>	vSphere 6.5 or later	4	8 GB	150 GB	1 Gbps
<b>VMware</b>	vSphere 6.5 or later	8	16 GB	150 GB	2 Gbps
<b>VMware</b>	vSphere 6.5 or later	16	64 GB	600 GB*	5 Gbps
<b>Hyper-V</b>	Windows Server 2016 w/ HW v8 or higher	2	8 GB	100 GB	500 Mbps
<b>Hyper-V</b>	Windows Server 2016 w/ HW v8 or higher	4	8 GB	150 GB	1 Gbps
<b>Hyper-V</b>	Windows Server 2016 w/ HW v8 or higher	8	16 GB	150 GB	2 Gbps
<b>Hyper-V</b>	Windows Server 2016 w/ HW v8 or higher	16	64 GB	500 GB	5 Gbp
<b>KVM</b>	Standard PC (Q35 + ICH9, 2009)	2	8 GB	100 GB	500 Mbps
<b>KVM</b>	Standard PC (Q35 + ICH9, 2009)	4	8 GB	150 GB	1 Gbps
<b>KVM</b>	Standard PC (Q35 + ICH9, 2009)	8	16 GB	150 GB	2 Gbps
<b>KVM</b>	Standard PC (Q35 + ICH9, 2009)	16	64 GB	500 GB	5 Gbps

### Cloud - IaaS Deployment

#### Brain Deployment

Cloud	VM Type	Cores	Memory	Storage (OS, Data, Data, Data) in GB	Performance
AWS	r5d.2xlarge	8	64 GB	256, 64, 128, 256	2 Gbps
AWS	r5d.4xlarge	16	128 GB	256, 64, 128, 256	5 Gbps
AWS	r5d.8xlarge	32	256 GB	256, 64, 128, 256	15 Gbps
Azure	Standard_E16s_v3	16	128 GB	256, 64, 128, 256	5 Gbps
Azure	Standard_E32s_v3	32	256 GB	256, 64, 128, 256	15 Gbps

#### vSensor Deployment

Cloud	VM Type	Cores	Memory	Storage (OS, Data) in GB	Performance
AWS	r5(n).large *	2	16 GB	50, 128	1 Gbps
AWS	r5(n).large *	4	32 GB	50, 128	2 Gbps
AWS	r5(n).2xlarge *	8	64 GB	50, 512	4 Gbps
AWS	r5(n).4xlarge *	16	128 GB	50, 512	8 Gbps
AWS	c5n.18xlarge *	72	192 GB	50, 128 (No PCAP capability) *	Up to 10 Gbps *
Azure	Standard_DS11_v2	2	14 GB	50, 128	1 Gbps
Azure	Standard_DS3_v2	4	14 GB	50, 128	2 Gbps
GCP	e2-standard-2	2	8 GB	50, 128	1 Gbps
GCP	e2-standard-4	4	16 GB	50, 128	2 Gbps

- AWS vSensor configurations include both “n” and non “n” r5 instance types.
  - Networking performance is quoted as “up to 10Gbps” on the r5 instances by AWS and can be influenced by neighboring instances allocated to the same physical hardware in AWS.
  - Networking performance is quoted as “up to 25Gbps” on the r5n instances by AWS. These instances are still shared with neighbors but are optimized by AWS to have higher overall network throughput.
  - Customers can work with AWS to utilize dedicated instances and distribute instances to provide the required networking throughput to their vSensor instances on that dedicated hardware.
- The c5n.18x large vSensor instance type does not have a rolling capture buffer and can therefore not support PCAP generation for Detections that originate from traffic that is processed by those instances.
- Due to variability in customer cloud network configurations and how mirroring may be configured, it is not possible to guarantee performance on any instance with more than 2 cores (numbers are approximate and based on even distribution of packets across threads). Please contact Vectra to discuss further.
- If using port mirroring via VXLAN, please contact Vectra to discuss performance.

**For more information please contact us at [info@vectra.ai](mailto:info@vectra.ai).**

Email [info@vectra.ai](mailto:info@vectra.ai) | [vectra.ai](https://www.vectra.ai)

© 2022 Vectra AI, Inc. All rights reserved. Vectra, the Vectra AI logo, and Security that thinks are registered trademarks and the Vectra Threat Labs and the Threat Certainty Index are trademarks of Vectra AI. Other brand, product and service names are trademarks, registered trademarks or service marks of their respective holders. Version: **062722**